


## S Year Warranty Lithium Ultra Slim Deep Cycle







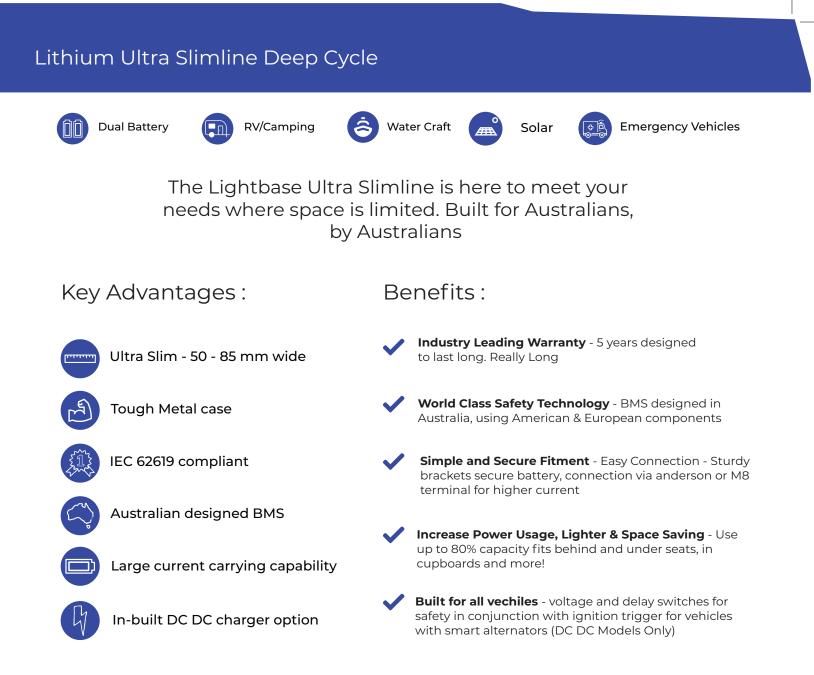

## Safety Features:

- Short Circuit Protection
- Over & Under Voltage Protection
- Current Protection
- Tempreture Protection

- · Cell balancing & Cell Level Protection
- Case melting point of 660°C
- Maximum connection 4 Series / 2 Parallel

Mode	Connection	A/H	Max Discharge Current	Dimensions (mm)			Weight
				Length	Width	Height	(KG)
LFP 12 -1105C	Anderson	110	240	636	50	256	13
LFP12-110SLDC20	Anderson	110	240	636	50	256	13
LFP 12-150SL	M8	150	240	549	85	235	17
LFP 12 –150SLDC40	M8 & Anderson	150	480	612	85	235	17